


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 19 TOWNSHIP 14 RANGE 5
DATE: 2-17-05 11-1-07
PARTY CHIEF: Wilcoxen- Greene
CREW: _____
TYPE OF MARKER: Harrison (w/pvc pipe over it)
METHOD OF ESTABLISHMENT: County: 10-29-98

IN. S.P.C. E ZONE NAD '83
NAME: 14051905
N: 488137.0830(m)
E: 69789.6063(m)

NOTE: This corner position
represents a title corner
and may not necessarily
be in the position of the
Record corner.

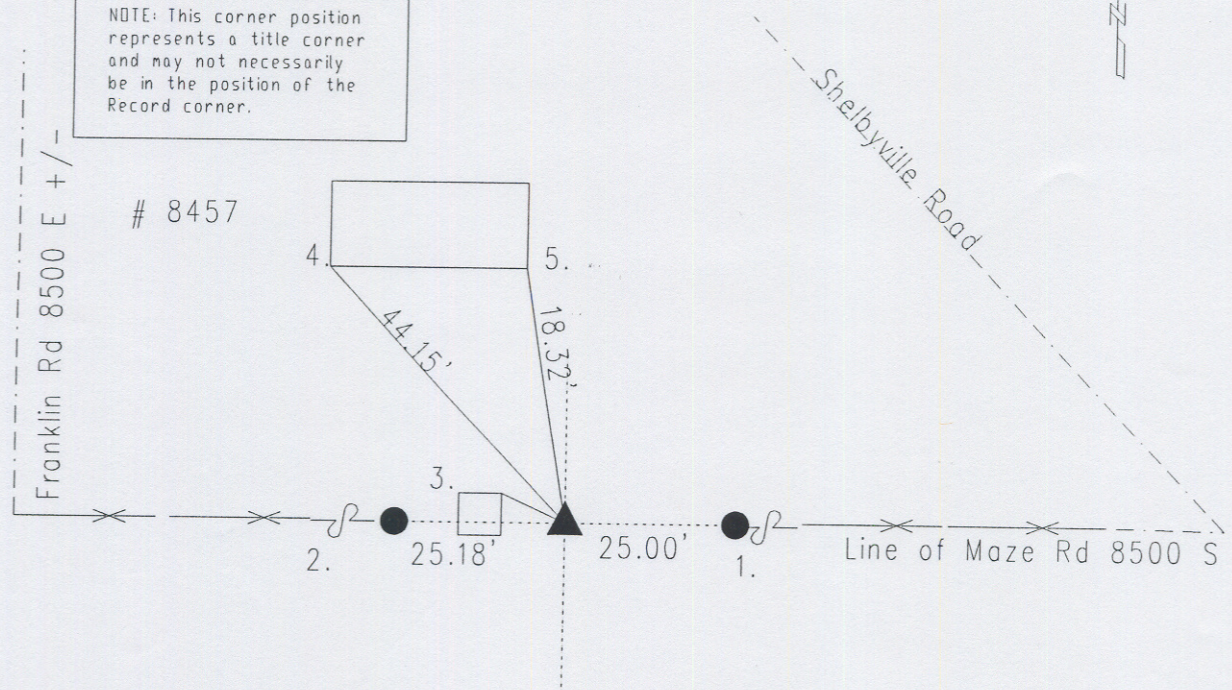

Original post set 1820 by Hendricks with no witness recorded in Marion County Atlas pg. 9. Hosbrook called rock set with witness: 8" oak S 45 E 6 links, 12" beech N 35 W 41 links. Monroe 3-12-58 called stone. McLand 4-17-72 called stone 4" above ground. Fortner 12-13-74 called stone 4" above ground. Wilcoxen 1-5-92 called same. Excavated 1-28-92 set Harrison. Re-tied 10-29-98 by Kiste. Re-tied 2-17-05 by Wilcoxen.

14051905

REF.	DISTANCE	DESCRIPTION
1.	25.00'	Due E to 1" iron pipe in fence row
2.	25.18'	Due W to 1" iron pipe in fence row
3.	7.74'	PK nail N 4"x4" wooden post
4.	44.15'	SW corner of metal garage
5.	18.32'	SE corner of metal garage